

RACE TECH

1501 Pomona Rd, Corona, CA 92878 • 951.279.6655 • racetech.com

FORK COMPRESSION & REBOUND GOLD VALVE INSTALLATION HONDA ST1300 2003+


<IP FMGV S2052C, FMGV S2057C.doc> P.Thede 6-15-22

TOOLS REQUIRED: In addition to the Service Manual along with common hand tools required for disassembly and assembly we recommend; TFSH 10 Shaft Holding Tool, TFBT 1014 Bleed Tool, TFSD 46 Seal Driver, Hi-Strength Loctite (provided), 400 grit (very fine) or finer Sandpaper.

CAUTION: THIS PROCEDURE SHOULD ONLY BE DONE BY A QUALIFIED SUSPENSION TECHNICIAN. IF YOU ARE NOT FAMILIAR WITH THIS PROCEDURE, STOP! CONTACT RACE TECH OR A QUALIFIED SUSPENSION TECHNICIAN.

DISASSEMBLY

- D1 **Disassemble the forks** and remove the cartridge.
- D2 **Remove the compression valve.** Push the compression valve into the cartridge about 1" (25mm). This allows access to the retaining clip. Remove the clip with a small screwdriver. Next screw the bolt back into the base to pull it out.
- D3 **Remove the rebound rod from the cartridge.** On some early models there is a Bottom-out Piston attached to the Damping Rod on the outside of the cartridge that must be removed. Being very careful not to damage the rod, hold the rod using the TFSH 10 Shaft Holding Tool. The Bottom-out Piston is held onto the rod with peening over a circlip on the rod (the circlip is not visible until the piston is removed). Spread the peening over the circlip by tapping down on the piston using a hammer and a 12" (300mm) length of ½" (12mm) electrical conduit (or some other piece of pipe) as a driver (or you can use a small chisel). This will spread the peening. Save the circlip and piston, they will be reused. Slide the rod out of the cartridge tube.
- D4 **Lightly file the peening** off the end of the shaft that holds on the nut. Remove the nut holding on the rebound valving and disassemble the valving stack. Lightly deburr the end of the thread.

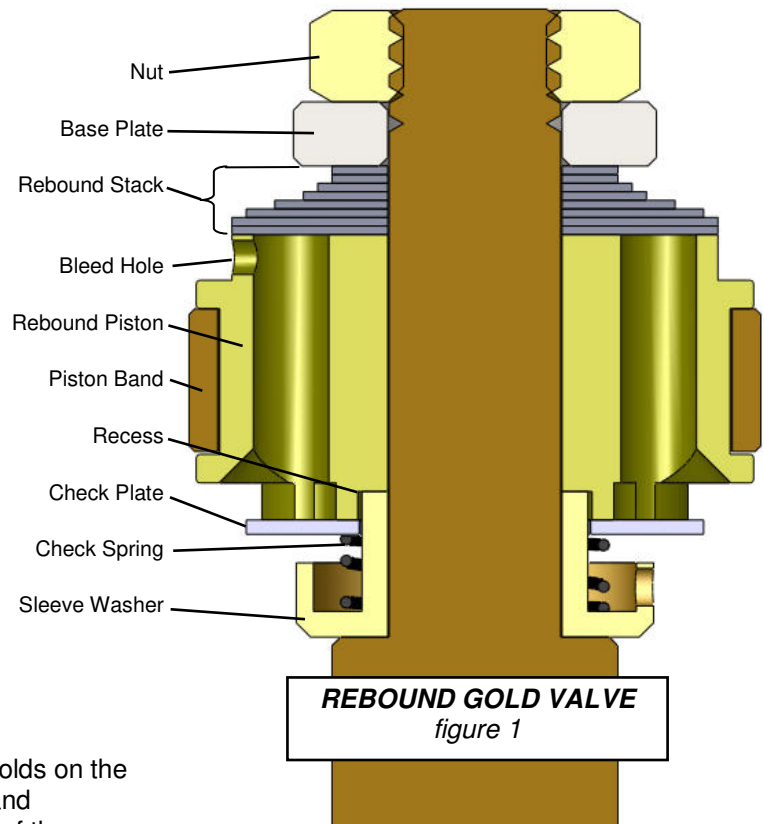

VALVING

- V1 **To obtain custom valving settings log on to racetech.com, go to DVS Valving Search, insert your Access Code, input your personal specifications and print the DVS Custom Setup Sheet.**
 - V2 **Assemble the Rebound Gold Valve.** Start with the Sleeve Washer, Check Spring, Check Plate, and Rebound Gold Valve (recess towards the Check Plate). Next install the **Rebound Valving Shim Stack (in supplied shim packs)**. Install the Base Plate and Nut). Use Loctite and torque the Nut to 30 in-lbs (0.35 kgf-m).
- Note: GOLD VALVES** supplied in this kit come with PRE-DRILLED BLEED HOLES for the ST1300.

Polish the damping rods with 400 grit (very fine) or finer sandpaper. This will drastically improve bushing life and reduce drag as well. The important part is the lower half of the rod as that is the part that contacts the damping rod bushing.

V3 Compare the valving with the recommended DVS Setup Sheet. Adjust as required. **Install the Gold Valve Compression Assembly** into the cartridge. Insert the circlip into the groove, screw the bolt back in and pull to seat the assembly on the circlip.

REASSEMBLY

R2 **Reassemble the forks according to your manual.** NOTE: 2003 Models use kit FMGV S2052C with a Short Compression Base. 2004 and later use FMGV S2057C with a Long Compression Base. See page 3 for comparison. Make sure you have the correct kit for your model OR swap the Gold Valve Assembly over to the Stock Compression Base.

R3 **Set the fork spring preload.** Follow the instructions in your Race Tech Fork Spring Kit.

Note: You must have washers on both ends of the spacer. The spacer must not rest directly on the spring or the cap.

R4 **Install the fork fluid.** Pump the cartridge rod using the TFBT 1014 Bleed Tool to bleed the air out.


Set the oil level according to the DVS using USF-05 Suspension Fluid with the fork and cartridge rod completely bottomed and the spring out.

R5 **Install Fork spring** with a washer, spacer, and washer.

R6 **Install the cap on the cartridge rod.** Use Loctite on the damping rod thread at the cap and torque it to manufacturer's specs.

FORK INSTALLATION

NOTE: When the forks are reinstalled on the bike it is very important to **align the fork tubes on the axle** so they won't bind. First, tighten the axle all the way, and then pump the forks with the right-hand axle clamp loose. Finally, tighten the axle clamp.

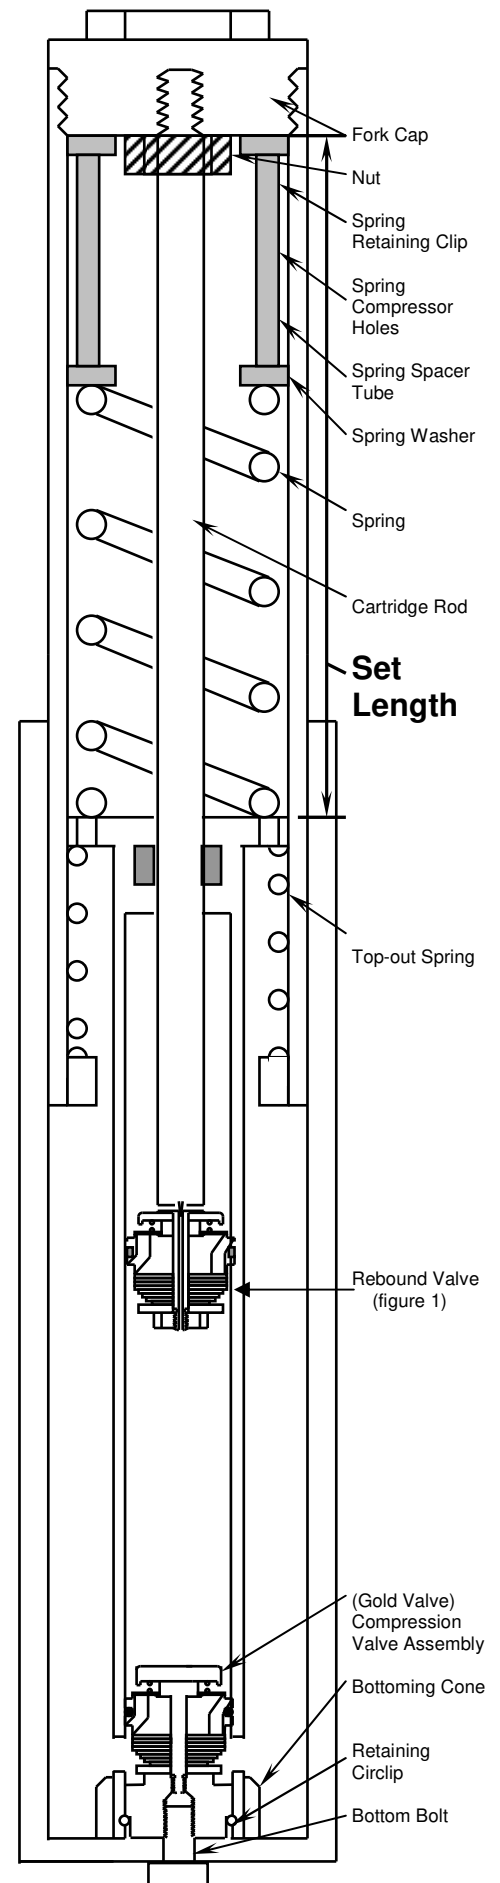



***2004+ Race Tech Complete Compression Valve Assembly
Kit FMGV S2057C (Long Base)***

***2003 Race Tech Complete Compression Valve
Assembly Kit FMGV S2052C (Short Base)***

For assistance call Tech Support 951.279.6655